PS1800 CS-37-1



Solar Surface Pump System

System Overview

Head max. 45 ft Flow rate max. 153 USG/min

Technical Data

Controller PS1800

- · Control inputs for dry running protection, remote control etc.
- Protected against reverse polarity, overload and overtemperature
- Integrated MPPT (Maximum Power Point Tracking)
- Battery operation: Integrated low voltage disconnect

max. 1.8 kW Input voltage max. 200 V > 102 V Optimum Vmp* Motor current max. 14 A Efficiency max. 98 % -22...122 °F Ambient temp. **Enclosure class** IP54

Motor ECDRIVE 1800 CS-37

- Maintenance-free brushless DC motor
- Premium materials, stainless steel: AL/AISI 304
- No electronics in the motor

Rated power 2.3 HP Efficiency max. 92 % Motor speed 900...3,300 rpm Insulation class IPX4 Enclosure class

Pump End PE CS-37-1

Premium materials: PP

Pump Unit PU CS-37-1 (Motor, Pump End)

Water temperature max. 140 °F Suction head max. 10 ft

Standards



2006/42/EC, 2004/108/EC, 2006/95/EC



UL 508, 1004, 1081 CSA C22.2 No. 14, 100, 108

IEC/EN 61702:1995. IEC/EN 62253 Ed.1

The logos shown reflect the approvals that have been granted for this product family. Products are ordered and supplied with the approvals specific to the market requirements.


*Vmp: MPP-voltage under Standard Test Conditions (STC): 1000 W/m² solar iradiance, 25 °C cell temperature



PS1800 CS-37-1




Solar Surface Pump System

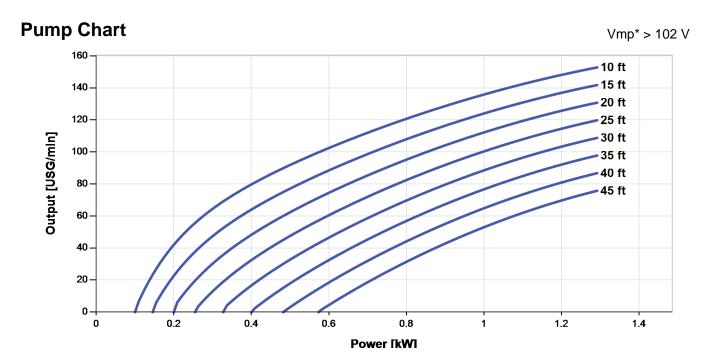


Dimensions and Weights


Controller


H = 16 in H2 = 14 in W1 = 7.0 inW2 = 6.1 inW3 = 4.6 inD = 6.5 in D1 = 5.9 in





Pump Unit [in]





	Net weight
Controller	9.9 lbs
Pump Unit	45 lbs
Motor	22 lbs
Pump End	23 lbs

^{*}Vmp: MPP-voltage under Standard Test Conditions (STC): 1000 W/m² solar iradiance, 25 °C cell temperature

BERNT LORENTZ GmbH & Co. KG

Kroegerskoppel 7, 24558 Henstedt-Ulzburg, Germany, Tel +49 (0)4193 7548-0, Fax -29, www.lorentz.de



